



Tiger DG710 T3 SURFACE DRILLS

TECHNICAL SPECIFICATION

Tiger DG710 is a hydraulic, self-propelled, self-contained, crawler based surface drilling rig equipped with a cabin (F.O.P.S. and R.O.P.S.) and rod handling system.

Typical applications for DG710 are road cutting, pipe-line drilling and foundation drilling, as well as production drilling in medium size quarries. Therefore DG710 is most often used by construction contractors, mines and quarries, and also included in the equipment fleet of rental houses as well.

KEY FEATURES

Hole diameter:	76 - 115 mm (3" - 4½")
Rock tools:	38, 45 or 51 mm (1½", 1¾" and 2") rods
Rock Drill	19,5kW
Engine output:	168 kW
Flushing air:	8,1 m ³ /min, up to 10 bar
Production capacity:	1,0 Mt/year
Total weight :	15 700 kg



STANDARD COMPONENTS

1 pc Rock drill HL 710, hydraulic
1 pc Chain feed CF 145H with movable drill steel support
1 pc Rod handler RH 714 incl. 1 set of jaws
1 pc Fixed boom
1 pc Carrier track mounted
1 pc Power pack diesel driven, hydraulic pumps and on-board compressor with twin pressure control
1 pc Control system Rock Pilot+
1 pc Operator's cabin F.O.P.S. and R.O.P.S. with AC
1 pc Dust collection system DC 810 H, hydraulic, Primary separator
8 pcs Working lights
1 pc Gauge set for accumulator pressure checking
1 pc Back-up alarm
1 Set Manuals, paper copy
1 Set Manuals, CD rom
safety devices without safety cage


THE JAWS FOR DRILL STEELS

DRILL STEEL TYPE	DRILL STEEL DIAMETER	RECOMMENDED HOLE DIAMETER
Extension rods	38 mm 1 1/2"	64 - 70 mm 2 1/2" - 2 3/4"
MF-rods	38 mm 1 1/2"	64 - 70 mm 2 1/2" - 2 3/4"
Extension rods	45 mm 1 3/4"	76 - 89 mm 3" - 3 1/2"
MF-rods	45 mm 1 3/4"	76 - 89 mm 3" - 3 1/2"
Extension rods	51 mm 2"	89 - 115 mm 3 1/2" - 4 1/2"
MF-rods	51 mm 2"	89 - 115 mm 3 1/2" - 4 1/2"


SELECTION OF OPTIONS

Alternative seat ISRI 6000
Radio with CD-MP3 player
Reversing camera
Spirit level angle indicator
TIM 5200 for vertical holes
TIM 5300 for vertical holes and depth measuring
TIM 6300 for inclined holes and depth measuring
Horizontal drilling kit
Hose reel (not with 14' rods)
Kit for alternative steels, each
Thread greasing
Telescopic boom
Guides for grousers, long
Hydraulic rear ground support
Three bar grouser plates
Towing hook
Fuel powered heater for engine and cabin
Fuel powered heater for engine, cabin and water tank
Dustmizer (engine heater option needed below freezing point)
Flushing control automatics
Shut down of suction for water holes
Water injection system
Extra manuals, price will be added according to pricing sheet
First service kit for DG710
Special tools for HL 710, HL650, field kit
Special tools for HL 710, HL650, complete
Service agreement - select level from extra item
SanRemo - select level from extra item

COVERAGE AREA AND DIMENSIONS

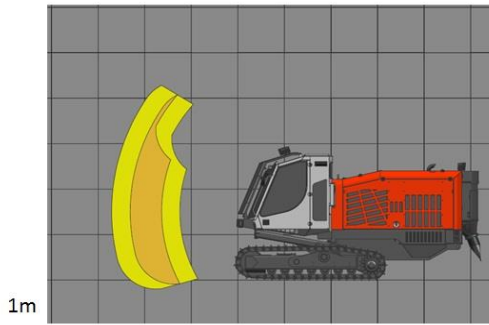


Horizontal drilling sideways


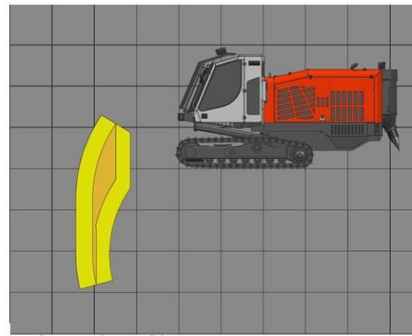


Vertical drilling

- Telescopic boom
- Fix boom

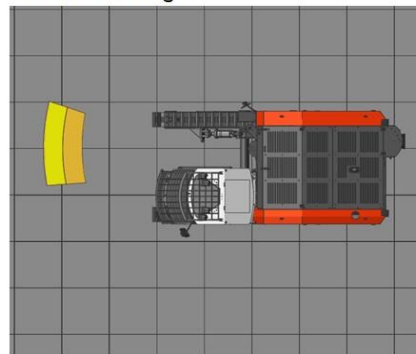


Drilling coverage

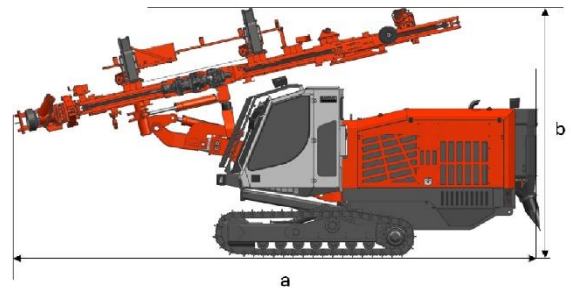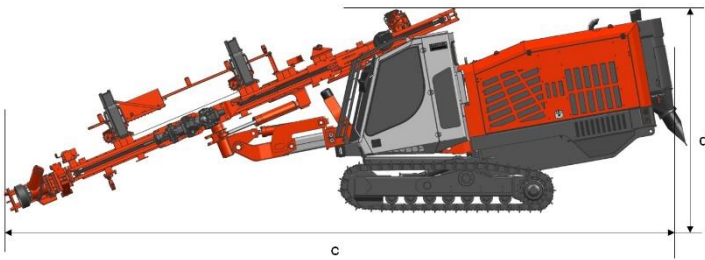

DIMENSIONS

Weight	15 700 kg
Width	2.45 m
Height	b 4,0 m / d 3,1 m
Total length	a 8.50 m / c 10,2 m



Sandvik Mining and Rock Technology reserves the right to make changes to the information on this data sheet without prior notification to users. Please contact a Sandvik representative for clarification on specifications and options.

ROCKTECHNOLOGY.SANDVIK