


RR340 rotary drill bit Single seal, simply works



Designed for performance in challenging conditions

Introducing the RR340 premium single sealed roller bearing bit. Designed for challenging ground conditions. You get great drilling performance also in wet and abrasive formations of medium or hard rock.

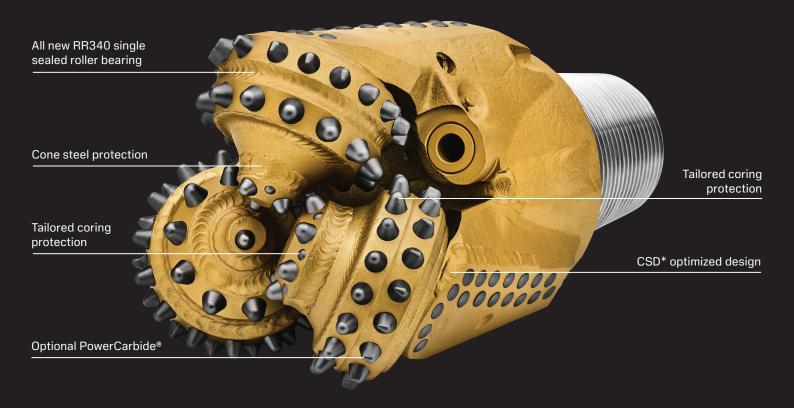

A closer look at the features

All new RR340 single sealed roller bearing

For consistent and long bearing hours in challenging drilling conditions.

Tailored coring protection

Improves wear protection in the nose to reduce coring.

Optional PowerCarbide®

Longer insert life in hard and abrasive rock.

Cone steel protection

Increases cone steel life and limits insert loss and coring.

CSD* optimized design

Improves bottom hole coverage and bit life.

Shirt tail tip hard metal protection

Increases bearing life and protects from bearing contamination.



The single seal effect

When drilling for the perfect blast, the new Sandvik RR340 simply works. The innovative single seal roller bearing technology and optional Sandvik PowerCarbide® inserts ensure reliable and efficient drilling with 45% longer service life compared to standard air bearing bits, as well as lower total drilling costs.

Where and when to use RR340

- Where air bearing failures occur, with a good cutting structure remaining
- When water is used for dust control
- In presence of ground water
- Abrasive applications
- Autonomous drilling



Ready for autonomous drilling

The high durability and long bit life minimize the need for frequent bit changes. This makes RR340 ideal for autonomous drilling operations. Our field tests prove that the RR340 gives increased bearing hours with +25%, meaning less bit changes – a plus both on the safety side and for the environment.

+45% increased service life



+25% more bearing hours

RR340 single sealed roller bearing bit +25%
Equivalent standard air bearing bit

466 less bit changes per year*

* Compared to equivalent standard air bearing bit

865000 USD in potential cost savings per year**

 $\rm **Compared$ to equivalent standard air bearing bit and a mine that operates at 1 500 000 drilled meters per year.

RR340 drill bit

		Softest formation Most aggressive bit							Hardest formation Least aggressive bit	
Bit size										
inch	mm	S04	S05	S15	S20	S30	S40	S47	S50	S60
6 3/4	171					Х				
7 7/8	200					Χ				
9	229	X	Χ					Χ		
9 7/8	251						Χ			X
10 5/8	270							Х		Х
12 1/4	311						Χ			Χ

Note: PowerCarbide® available on selected models and we are continually adding new bit sizes and types to our product line, please consult with your Sandvik representative for the most current offerings.

