


SANDVIK TUBEX SYSTEMS

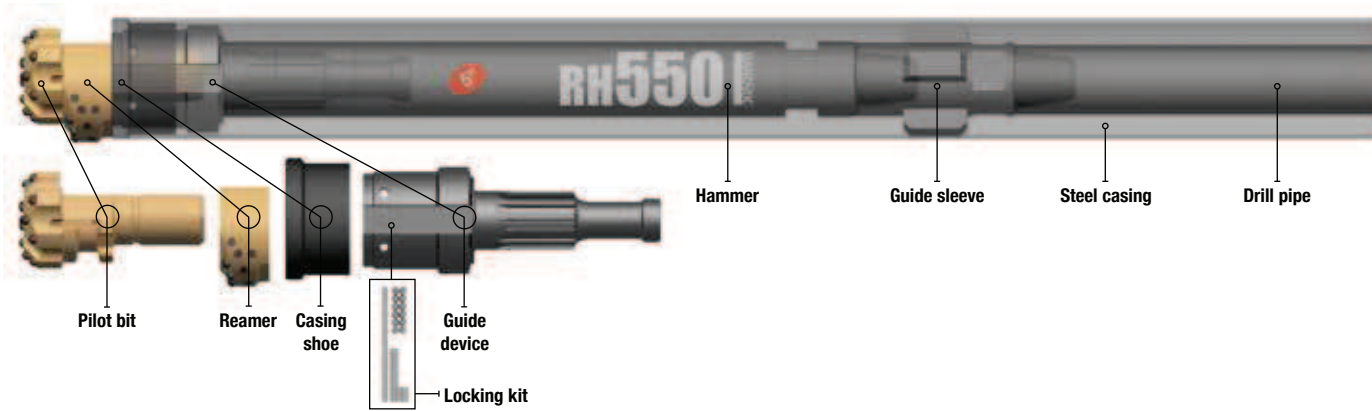

Tubex product range

Tubex type	Casing, recom. size (mm)		Min. wall thickness (mm)	Max. drill bit diameter (mm) A	Reaming diameter (mm)
	Max. OD	Min. ID			
90	115	102	5	90	123
115	142	128	5	115	152
140	171	157	5	140	187
165	196	183	5,5	165	212
180	219	194	6,3	180	232
190	222	205	6,3	190	237
240	273	260	6,3	240	306
280	327	305	7,1	280	370

Tubex XL-90

Part	Description	Weight (kg)	Weight (lb)	Part no.
Guide device	M30	7	15,4	80-3A00-090D
Guide device	DHD3,5 (Foot valve, 47-24017)	7	15,4	80-2400-090D
Pilot bit	1/8, 12/12, CV, DP65	3,6	7,9	81-090B-090A65
Eccentric reamer		1,4	3	82-090B-123W65
Casing shoe		1,1	2,4	84-090D-00
Locking kit		0,5	1	85-090A-KT

Tubex XL-115

Guide device	M40	12	26,4	80-4800-115D
Guide device	DHD340 (Foot valve, 47-36017)	12	26,4	80-3600-115D
Guide device	QLX40 (Foot valve, 47-4G017)	12	26,4	80-4G00-115D
Pilot bit	2/8, 14/14, CV, DP65	8	17,6	81-115A-115A65
Eccentric reamer		2,6	5,7	82-115A-152W65
Casing shoe		1,6	3,5	84-115D-00
Locking kit		0,5	1	85-115A-KT

SANDVIK TUBEX SYSTEMS

Tubex XL-140				
Part	Description	Weight (kg)	Weight (lb)	Part no.
Guide device	QL50 (Foot valve, 47-55017)	21	46,3	80-5500-140D
Guide device	DHD350 (Foot valve, 47-69037)	21	46,3	80-6900-140D
Pilot bit	2/8, 14/14, CV, DP65	11	24,2	81-140A-140A65
Eccentric reamer		4	8,8	82-140A-189W65
Casing shoe		2,4	5,3	84-140D-00
Locking kit		0,5	1	85-140A-KT

Tubex XL-165				
Guide device	M60	34	75	80-6800-165D
Guide device	DHD360 (Foot valve, 47-73017-1)	34	75	80-7300-165D
Guide device	QL60 (Foot valve, 47-76017)	34	75	80-7600-165D
Pilot bit	2/8, 16/16, CV, DP65	17	37,5	81-165A-165A65
Eccentric reamer		7	15,4	82-165A-212W65
Casing shoe		3,2	7	84-165D-00
Locking kit		0,5	1	85-165A-KT

Tubex XL-180				
Guide device	DHD360 (Foot valve, 47-73017-1)	44	97	80-7300-180D
Pilot bit	2/8, 16/16, CV, DP65	24	53	81-180A-180A65
Eccentric reamer		10	22	82-180A-232W65
Casing shoe		4	8,8	84-180D-00
Locking kit		0,5	1	85-180A-KT

Tubex XL-190				
Guide device	M60	40	88	80-6800-190D
Guide device	QL60 (Foot valve, 47-76017)	44	97	80-7600-190D
Guide device	DHD360 (Foot valve, 47-73017-1)	44	97	80-7300-190D
Pilot bit	3/8, 16/16, CV, DP65	29	64	81-190A-190A65
Eccentric reamer		10	22	82-190A-237W65
Casing shoe		4	8,8	84-190D-00
Locking kit		0,5	1,0	85-190A-KT

Tubex XL-240				
Guide device	M80	67	148	80-8800-240D
Guide device	DHD 380 (Foot valve, 47-87017)	67	148	80-8700-240D
Pilot bit	2/12, 16/16, CV, DP65	46	101	81-240B-240A65
Eccentric reamer		18	40	82-240B-308W65
Casing shoe		7	15,4	84-240A-00
Locking kit		1	2,2	85-240A-KT

Tubex XL-280				
Guide device	SD10 (Foot valve, 47-10017)	160	353	80-1000-280A
Pilot bit	3/12, 18/18, CV, DP65	88	194	81-280A-280A65
Eccentric reamer		43	94	82-280A-378W65
Casing shoe		15	33	84-280A-00
Locking kit		1,5	3,3	85-280A-KT